

DL-34F26B/DL-34F28B

4MP HD 4 in 1 Camera



True WDR



3D DNR



6KV
Protection



Day&Night



IP67




IK10

Features

- IR distance: 20-30m
- DNR, True WDR
- Lightning Protection up to 6KV
- AHD/TVI/CVI/CVBS video output
- IP67 ingress protection
- IK10
- Video Linkage with Access Control System (BioSecurity 3.0)

Dimensions

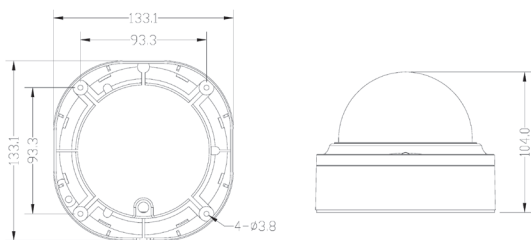

Specifications

Model	DL-34F26B	DL-34F28B
Camera		
Image Sensor	1/3" 4MP CMOS	
Efecitive Pixels	2560*1440	
Shutter Time	1/25s~1/50,000s (PAL);1/30s~1/60,000s (NTSC)	
Image System	PAL/ NTSC	
Video Frame System	4MP@25fps (PAL); 4MP@30fps (NTSC)	
IR Distance	20-30m (30-50m optional)	
Video Output	AHD/TVI/CVI/CVBS	
Lens	2.8-12mm Varifocal	2.8-12mm Motorized
Lens Mount	Φ14	
Horizontal FOV	25°-91°	
S/N Ratio	≥50dB	
Functions		
OSD	UTC support based on DVR	
AGC	Support	
White Balance	Auto/Manual	
Day & Night	Auto/Manual	
Video Setting	Contrast/Sharpness/Color Gain/Format/True WDR/DNR	
Language	Multi-Language	
General		
Casing	Aluminium alloy	
Ingress Protection	IP67	
Working Environment	-30℃ ~ 60℃ /Humidity 10%~90℃ RH	
Power Supply	DC12V±10% 1.5A	
Power Consumption	3.5W MAX (IR cut off)	
Dimension	Φ133.1x104.0mm	
Net Weight	500g	

