

# UA400

## Revolutionary Fingerprint Time Attendance Terminal



UA400 adopts the brand new firmware and provides an unprecedented user experience. It brings innumerable surprises, including the stunning GUI, rock-solid stability, fast matching speed and expandability.

Users can easily manage data by networking UA400 via RS232/485, TCP/IP, USB Host or USB Client. Most importantly, all the functions can still operate in a networking state. UA400 is compatibility with various types of USB flash disks, ADMS and former SDK. It also supports data backup and retrieve to avoid the risk of accidental deletion.

It promotes the fingerprint time & attendance management to the next level. You can get the best of benefits from the UA400.

### Feature

#### Remarkable user experience

- Intuitive and stunning UI designed with the most popular and internationalized factor.
- Interface operation adopts modularized hierarchical design. Simpler, Better and More logical.
- Faster matching speed: less than 0.5 second.

#### Excellent expandability

- Easy to extend functions and customize customers' demand.


#### Enhanced features and performance

- Support user validity settings.
- Support data backup and retrieve.
- Support advanced Workcode consisted of letters and numbers.
- Support chip encryption for firmware protection.
- Support more flexible menu configuration: double line text display.
- Support external printer for attendance records output (Optional).


# Specifications

<b>Fingerprint Capacity</b>	3000 (1:N)
<b>ID Card Capacity</b>	10,000 (Optional)
<b>Record Capacity</b>	100,000
<b>Display</b>	3-inch Screen
<b>Communication</b>	TCP/IP, RS232/485, USB ( host & client)
<b>Standard Functions</b>	Web Server, Short Message, Automatic Status Switch, Self-Service Query, Work Code, T9 input, 9 Digits User ID, DST, Schedule Bell, ADMS
<b>Optional Functions</b>	ID/Mifare Card, External Printer and Bell, Photo-ID
<b>Software</b>	BioTime
<b>Power Supply</b>	DC 5V 0.8A
<b>Verification Speed</b>	≤0.5 sec
<b>Operating Temp.</b>	0 °C- 45 °C
<b>Operating Humidity</b>	20%-80%
<b>Dimension</b>	180 × 135 × 37 mm (Length × Width × Thickness)
<b>Net Weight</b>	0.70 kg


## Configuration

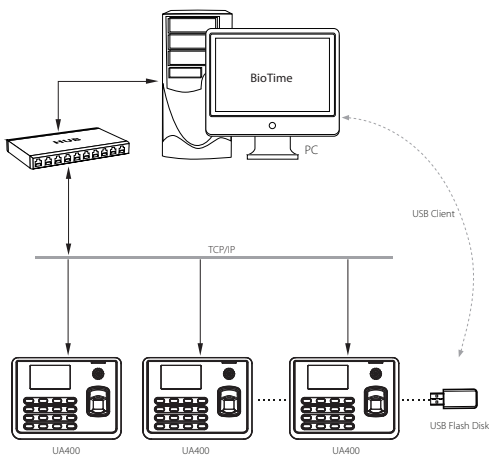


## What's in the Box




UA400



Back Plate



Power Adapter



USB Cable



Software CD



Screws and Holders



Star-shape  
Screw Driver



ZKTeco Middle East  
E-mail: [zk\\_me@zkteco.com](mailto:zk_me@zkteco.com)  
[www.zkteco.me](http://www.zkteco.me)

© Copyright 2014. ZKTeco Inc. ZKTeco Logo is a registered trademark of ZKTeco or a related company. All other product and company names mentioned are used for identification purposes only and may be the trademarks of their respective owners. All specifications are subject to change without notice. All rights reserved.

