

EL-54N28I

4MP H.265 IP Camera



True WDR



H.265



6KV Protection



3D DNR




IP67

Features

- 4.0MP H.265 real-time coding
- 3D DNR, True WDR
- IR-Cut filter, Day&Night
- PoE power supply
- Lightning Protection up to 6KV
- IP67 ingress protection
- Support iOS/Android Phone/Pad, remote monitoring
- Video Linkage with Access Control System(BioSecurity 3.0)

Dimensions

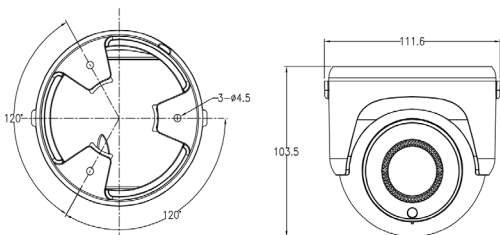

Specifications

Model	EL-54N28I
Camera	
Image Size	2560*1440
Image Sensor	4.0MP 1/3" Progressive Scan CMOS
Min. illumination	Color: 0.01Lux @ (F1.2,AGC ON); 0 Lux with IR B/W: 0.001Lux @ (F1.2,AGC ON); 0 Lux with IR
Shutter Time	1/25s to 1/10,000s
Lens	2.8-12mm Motorized
Lens Mount	Φ14
Horizontal FOV	25°-91°
Day & Night	IR-Cut filter with auto switch
Digital NR	3D DNR
IR Range	20-30m
Image	
Resolution	4MP (2560*1440), 3MP (2048*1520, 2304*1296), 1080P (1920*1080), 720P (1280 * 720P), D1, CIF
Main Stream	2560*1440@25fps
Sub Stream	704*576@25fps
Third Stream	1280*720@25fps
Image Settings	Saturation, Brightness and Contrast are adjustable through Web browser or Client software.
Compression	
Video Compression	H.265/H.264
Bite Rate	32Kbps~8Mbps
Encode Mode	VBR/CBR
Audio	G.711A/G.711Mu/G.726/G.726ASF
Interface	
Ethernet	1*10/100Mbps RJ45 Ethernet port
Audio I/O	N/A
Network	
Network Storage	Support 802.1X
Alarm Tigger	Motion Detection, Private Masking, Video Masking, Local Alarm, etc.
Network Protocols	TCP/IP, UDP, HTTP, IGMP, ICMP, DHCP, RTP/RTSP, DNS, DDNS, FTP, NTP, PPPOE, UPNP, SMTP, SNMP
Interface Protocol	ONVIF Profile S 2.6/ API
ROI	Support 4 fixed region for mainstream and sub stream separately
Line Cross Detection	Cross a pre-defined virtual line, up to 1 pre-defined virtual lines supported
General Function	Anti-flicker, Dual-stream, Image Capture, Password Protection
General	
Temperature	-30 C ~ 60 C
Humidity	10%-90% RH
Power Supply	DC12V±10% 2A, PoE; Max. 3W
Protection Level	IP67
Weight	400g
Dimensions	Φ111.6*105mm

