

ZKTeco

M6

Time Attendance Terminal features Facial Recognition technology
Integrates with the Cloud-Based Management System BioTime Cloud



Facial
Recognition



RFID



Fingerprint



2.4GHz Wi-Fi
Bluetooth 4.2

Compatible with




ZKTeco's M6 is a time & attendance terminal with multi-biometrics authentications and supports connecting BioTime Cloud. Also, M6 adopts the facial recognition technology and equips with the in-glass fingerprint verification method, providing an all-rounded time and attendance management.

When M6 connects to BioTime Cloud, users can enjoy many features, including remote user registration and real-time reporting. Additionally, with BioTime Cloud, users can create flexible timesheets through M6, setting up timetables with multiple report formats to satisfy various time and attendance management needs.


Features

- Visible light facial recognition technology and in-glass fingerprint verification
- Multiple authentication methods: Face / Fingerprint / Card
- Card modules: 125kHz ID Card (EM) / 13.56MHz IC Card
- Communication: TCP/IP / 2.4GHz Wi-Fi / Bluetooth 4.2
- Supports simple access control function
- Wall-mounted and desktop-mounted; 2-in-1 backplate design
- Compatible with BioTime Cloud Cloud-Based Software & ZKBio TimeCloud Mobile App

BioTime Cloud (Cloud-Based Time Management Solution)

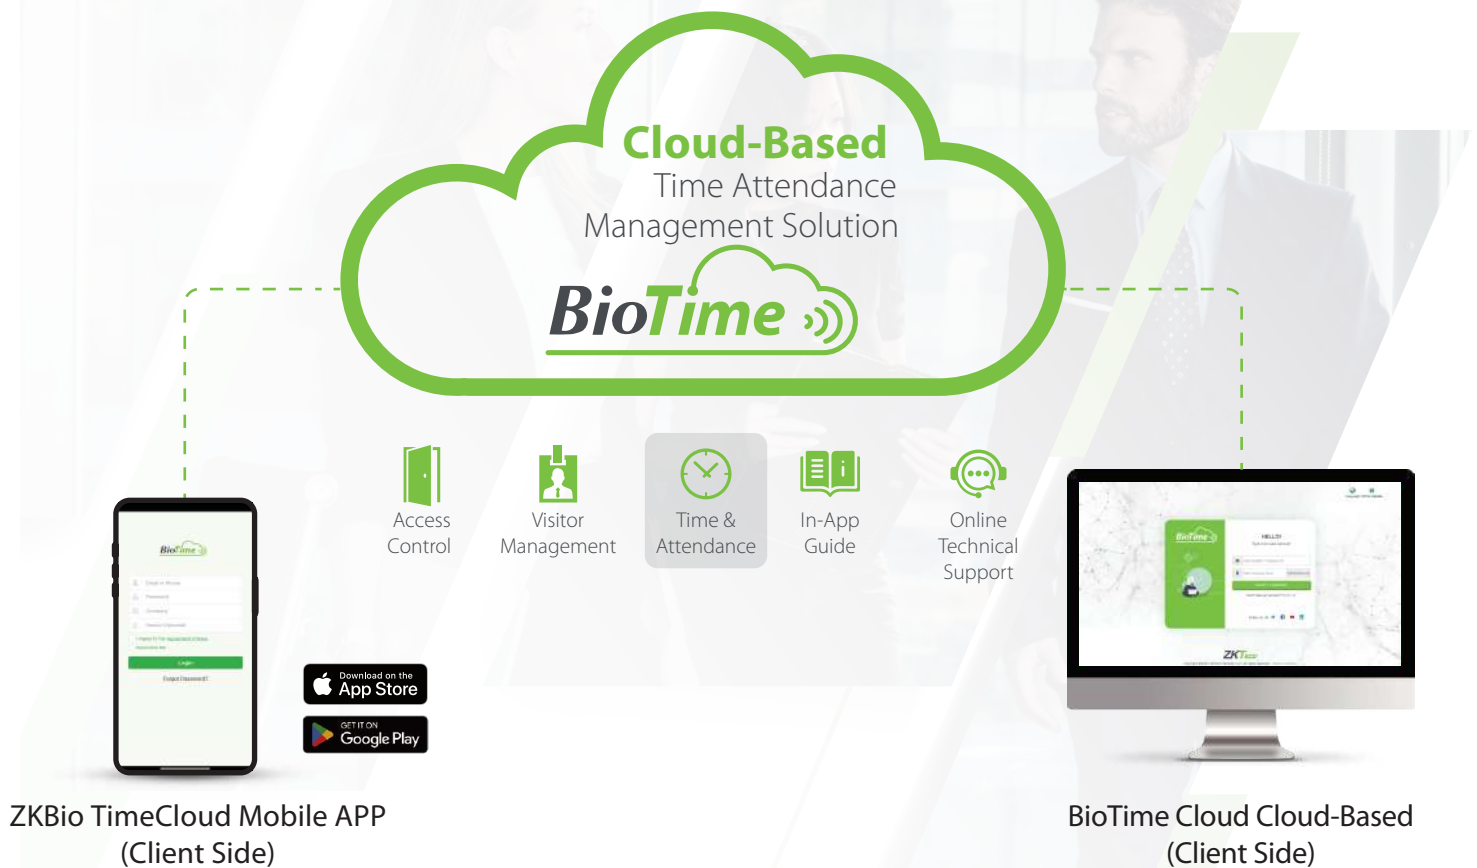

Configuration

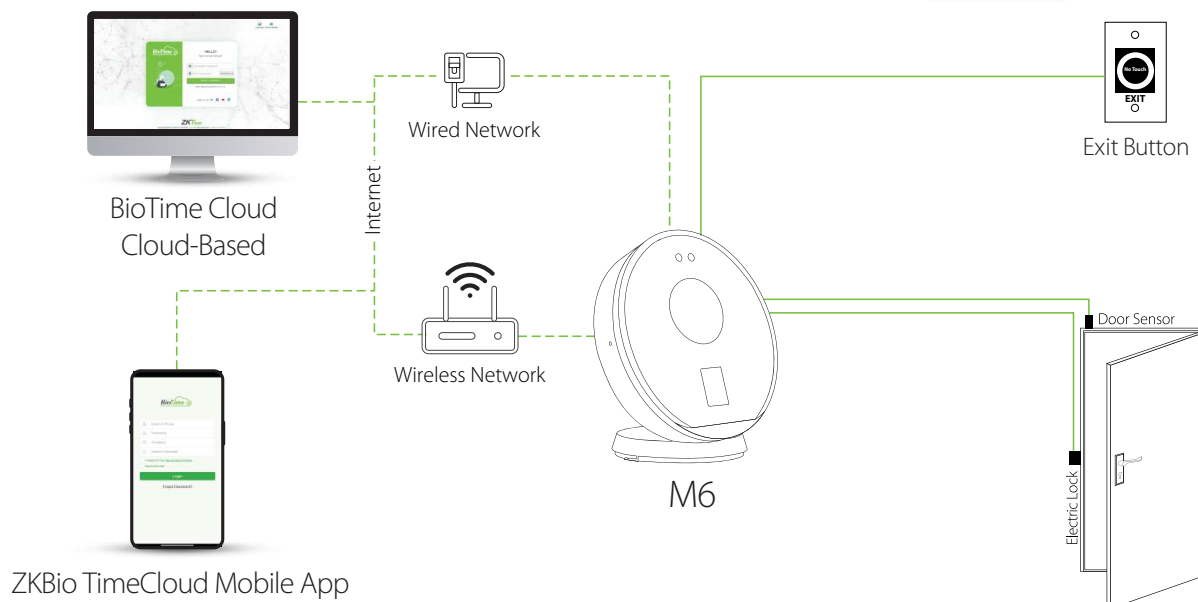


Specifications

Display	2.8" Non-touch LCD Display (Φ40mm circular display area), 240x320 Pixel	
Face Capacity	3,000	
Fingerprint Capacity	3,000	
Card Capacity	3,000	
Transactions	150,000	
Communication	TCP/IP, 2.4GHz Wi-Fi (IEEE 802.11b/g/n), Bluetooth 4.2	
Standard Functions	ADMS, DST, T9 Input, Camera, 14-digit User ID, Multiple Verification Methods	
HardWare	1.0GHZ Dual Core A7 CPU, 256MB RAM/512MB ROM, 1MP Binocular Camera	
Access Control Interface	3rd Party Electric Lock, Door Sensor, Exit Button	
Optional Functions	125kHz ID Card (EM) / 13.56MHz IC Card	
Biometrics Algorithm	ZKFace VX3.5 & ZKFinger V10.0	
Facial Recognition Speed	≤1s	
Facial Recognition Distance	0.3 to 1.6m	
Facial Recognition Rate	FAR ≤ 0.001%; FRR ≤ 1%	
Supported Software	BioTime Cloud	
BioTime Cloud (Time & Attendance)	Organization Management	including Person, Department, Site, Zone
	Flexible Timesheet Settings	Create Timesheet, Set Timesheet Rules
	Multiple Report Formats	First and Last Report, Person Monthly Report
	Shift Scheduling	Employee Schedule
Power Supply	12V / 1.5A	
Working Humidity	20% to 80%	
Working Temperature	0°C to 45°C	
Dimensions (mm)	Φ124.92 * 27.1 (Diameter*Width)	

Dimensions (mm)

Terminal

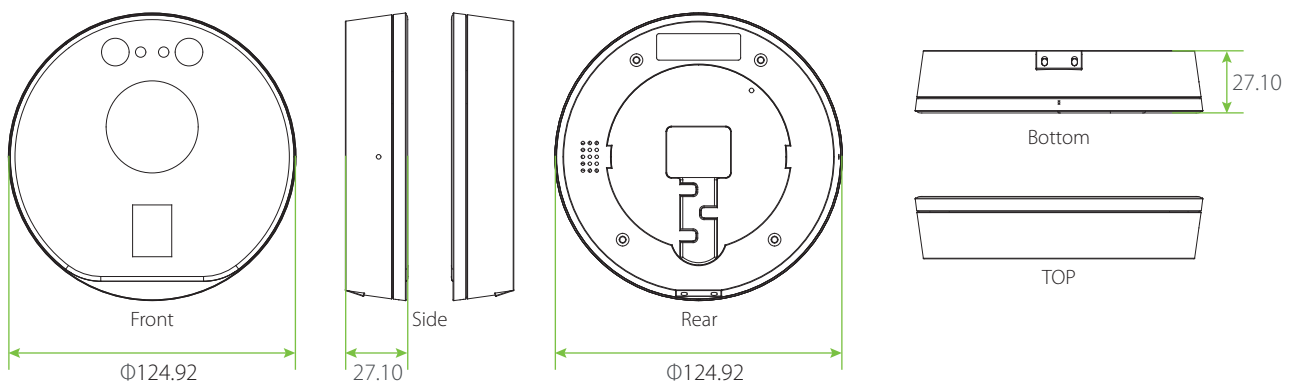

Bracket

