


ZK-IWB65/75/86BE

4K Smart Interactive Whiteboard



Key Features

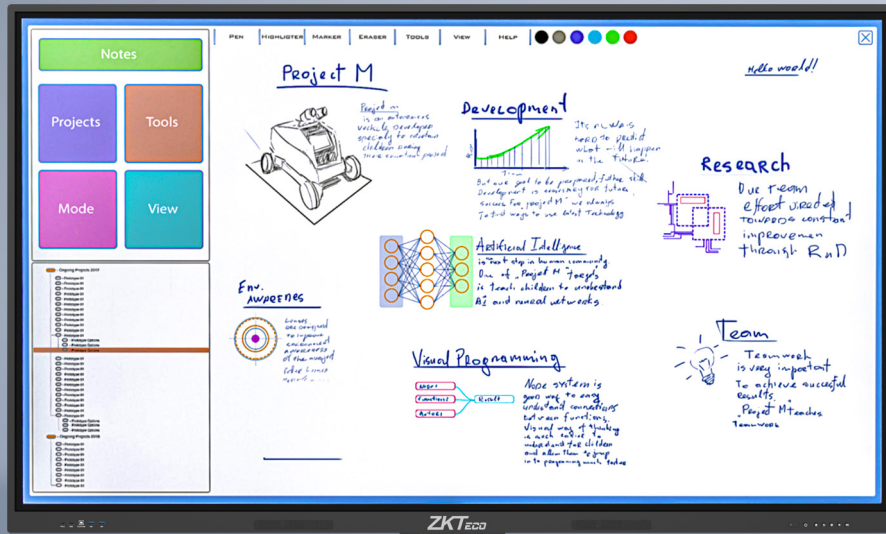

4K UHD Display




Android 13



400 Nits



40 Touch Points



Dual System



Type-C (65W)

Specifications

Model	ZK-IWB65BE	ZK-IWB75BE	ZK-IWB86BE
Screen Parameters			
Screen size	65 inch	75 inch	86 inch
Screen Type	ADS	ADS	IPS
Backlight	D-LED		
Backlight life	30,000 hours (min.)(typ.)		
Resolution	3840 × 2160 (pixels)		
Brightness	400cd/m ² (typ.)		
Contrast Ratio	1200:1 (typ.)		
Response Time	6.5ms	8ms	8ms
Refresh Frequency	60Hz		
Aspect Ratio	16:09		
View Angle	178°(H) / 178°(V)		
Display Colors	1.07B (8bit+FRC)		
Bonding Technology	The gap between tempered glass and screen is close to 0		

Touch Parameters			
Touch Technology	Advanced infrared touch technology		
Touch Points	Up to 40		
Touch Response Time	≤ 5ms		
Accuracy	Center 90% touch area: 1mm		
Anti-Glare	High transparent+Smooth+Anti-glare		
Glass Hardness	9H (Pencil Hardness) ; 7(Mohs Hardness) Tempered Glass		
Writing Height	≤3mm		
System			
CPU	Quad core A55		
GPU	MaliG52 MP2		
Memory (RAM)	4GB (8GB Optional)		
Storage (ROM)	32GB (128GB Optional)		
Operating System	Android 13.0 / Windows 11.0 (Optional)		
Connectivity			
Front Port	USB 3.0*2 Type-C (65W)*1 Touch-USB*1 HDMI2.0*1		
Bottom Port	LAN IN/OUT*2 RS232 IN*1 MIC IN*1 AUDIO OUT*1 SPDIF OUT*1		
Side Port	Touch-USB*2 HDMI IN*2 USB 2.0*1 USB 3.0*1 OPS Slot *1		
WiFi	WiFi 5 (IEEE 802.11 ac/b/g/n)		
Bluetooth	BT 5.1: 2.1+EDR/4.2/5.1		
Built-in Peripherals			
Speaker	2*16W		
Power			
Operating Power	100 V ~ 240 V/AC, 50/60 Hz		
Standby power consumption	<0.5W		
Average power consumption (Without OPS)	200W	300W	380W
Physical			
Dimensions (W × H × D)	1482.1×87.7×897.4 mm	1716.5×87.7×1031.8 mm	1967.8 x87.7.x1169.9 mm
Package Dimensions (L × W × H)	1640×185×1010 mm	1860×185×1125 mm	2095×185×1265 mm
Net Weight (kg)	38Kg	52.5Kg	65.5Kg
Weight with Packaging (kg)	46Kg	62.5Kg	73Kg
Case Material	Aluminum alloy and engineered metal framework		
Color	Black		

Environment

Operating Temperature	0°C to 40°C
Storage Temperature	10°C to 60°C
Operating Humidity	20% to 80% RH (Non-condensing)
Storage Humidity	10% to 60% RH (Non-condensing)

Accessories

Cables	Power Cable*1 USB Cable*1 HDMI Cable*1
Remote Controller	1
Wall mount	1
Stylus Pen	2
Eraser	1

Peripheral Accessories (Optional)

Movable bracket	YES
OPS	YES
Wireless Dongle	YES

Applications



Classroom



Meeting Room



Exhibition

