


SC02-I565/75/86A

4K Smart Interactive Whiteboard

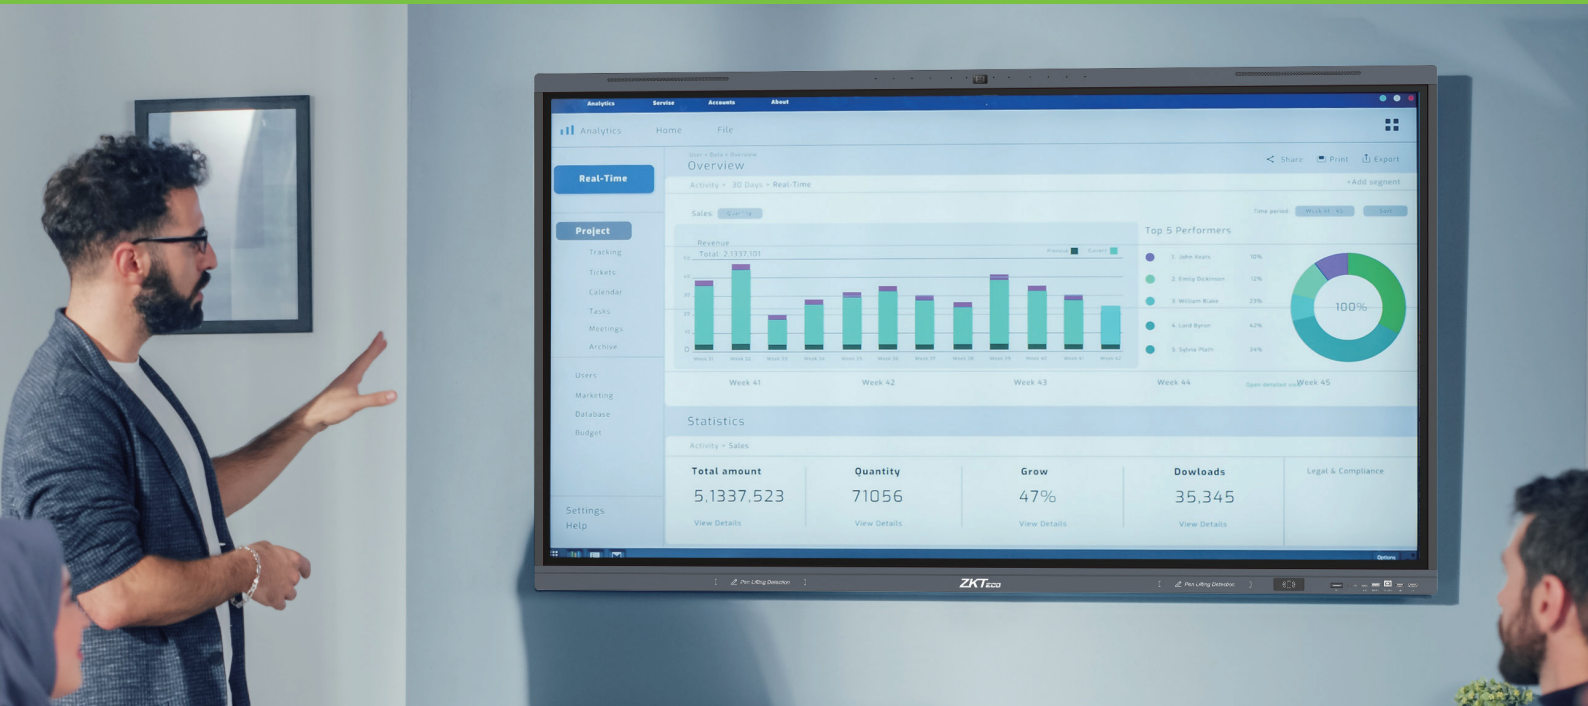


ZKTeco's 4K digital interactive whiteboard aims to promote the sharing of inspirational knowledge business and education. The integrated meeting solution of SC02-I565/75/86A product offer screen sharing, white-board writing and remote video conference, which strengthen collaboration.

Features




4K UHD Display



CPU: Quad core A76 + Quad core A55



Built-in 48-mega pixels Camera



Android 13.0 & Windows 11 (Optional)



8 Microphones Array



NFC Compatibility:
ISO/IEC 14443 Type A & Type B cards



Connect 9-Devices Display
Simultaneously

Specifications


Model	SC02-I565A	SC02-I575A	SC02-I586A
Screen			
Screen size	65-inch	75-inch	86-inch
Screen type	VA	ADS	IPS
Backlight	D-LED		
Backlight Life (typ.)	50,000 hours (min.) (typ.)		
Resolution	3840 × 2160 (pixels)		
Brightness	350cd/m ² (typ.)	400cd/m ² (typ.)	400cd/m ² (typ.)
Contrast Ratio	4000:1 (typ.)	5000:1 (typ.)	5000:1 (typ.)
Response Time	8ms (typ.)		
Frequency	60Hz		
Aspect Ratio	16:09		
Viewing angle	178°(H) / 178°(V)		
Display Colors	1.07B(8bit+FRC)		
Bonding Technology	The gap between tempered glass and screen is close to 0		
Touch			
Touch Technology	High Precision IR		
Touch Points	Up to 50		
Touch Response Time	≥2ms		
Touch Accuracy	Center 90% touch area: 1mm		
Anti-Glare	High transparent+Smooth+Anti-glare		
Glass Hardness	9H (Pencil Hardness) ; 7(Mohs Hardness) Tempered Glass		
Writing Height	≤ 1mm		
System			
CPU	Quad core A76+Quad core A55		
GPU	Mali-G610 MP4		
Memory (RAM)	8GB (up to 16GB)		
Storage (ROM)	128GB (up to 256GB)		
Operating System	Android 13 (standard)/ Windows 11 (Optional)		
Connectivity			
Front Port	USB 3.0*2; Type-C (100W)*1; Touch*1; HDMI IN: 1		
Bottom Port	USB 2.0*1; DP IN*1; Touch*1; RS232*1; LAN*2; SPDIF*1		
Side Port	AUDIO IN*1; AUDIO OUT*1; Type-C OUT*1; USB 3.0*2; Touch * 1; HDMI IN: 3; HDMI OUT*1; Type-C*1; OPS slot (for slot-in PC)*1		
Built-in peripherals			
WiFi+Bluetooth	Wi-Fi 6: 802.11 ax/b/g/n/ac		
	BT 5.2: 2.1+EDR/4.2/5.2		
NFC	ISO / IEC 14443 Type A & Type B cards		
Camera	Pixel	48 MP	
	POV	FOV Diagonal 106°	
	Face tracking	Support	
	Sound localization	Support	

Microphone	Array quantity	8 microphones array(up to 12m)		
	Pickup Range	Support		
	3D noise reduction	Support		
	AEC & AGC	Support		
Speaker		2x8W + 2x18W		
Power				
Operating Power		100 V ~ 240 V/AC, 50/60 Hz		
Standby Power Consumption		<0.5W		
Power Consumption(typ.) (100% Brightness)		200W	300W	550W
Physical				
Dimensions (W × H × D)		1488x86x915mm	1709x86x1039mm	1957 x98.5 x1179mm
Package Dimensions (L × W × H)		1628x208x1014mm	1863x225x1163mm	2110x225x1304mm
Net Weight (kg)		40kg	52.5kg	64kg
Weight with Packaging (kg)		52kg	64kg	84kg
Case Material		Aluminium Alloy and Sheet Metal		
Color		Blue Grey		
Environment				
Operating Temperature		0°C to 40°C		
Storage Temperature		10°C to 60°C		
Operating Humidity		20% to 80% RH (Non-condensing)		
Storage Humidity		10% to 60% RH (Non-condensing)		
Accessories				
Cables		Power Cable*1, USB Cable*1, HDMI Cable*1		
Remote Controller		1		
Wall Mount		1		
Stylus Pen		2		
Eraser		1		
Peripheral Accessories (Optional)				
Movable bracket		YES		
OPS		YES		
Wireless Dongle		YES		

Applications



Training room

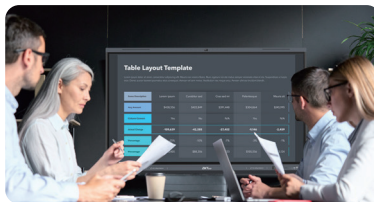

Meeting room



Show room

