


SC02-I565/75/86A

4K Smart Interactive Whiteboard

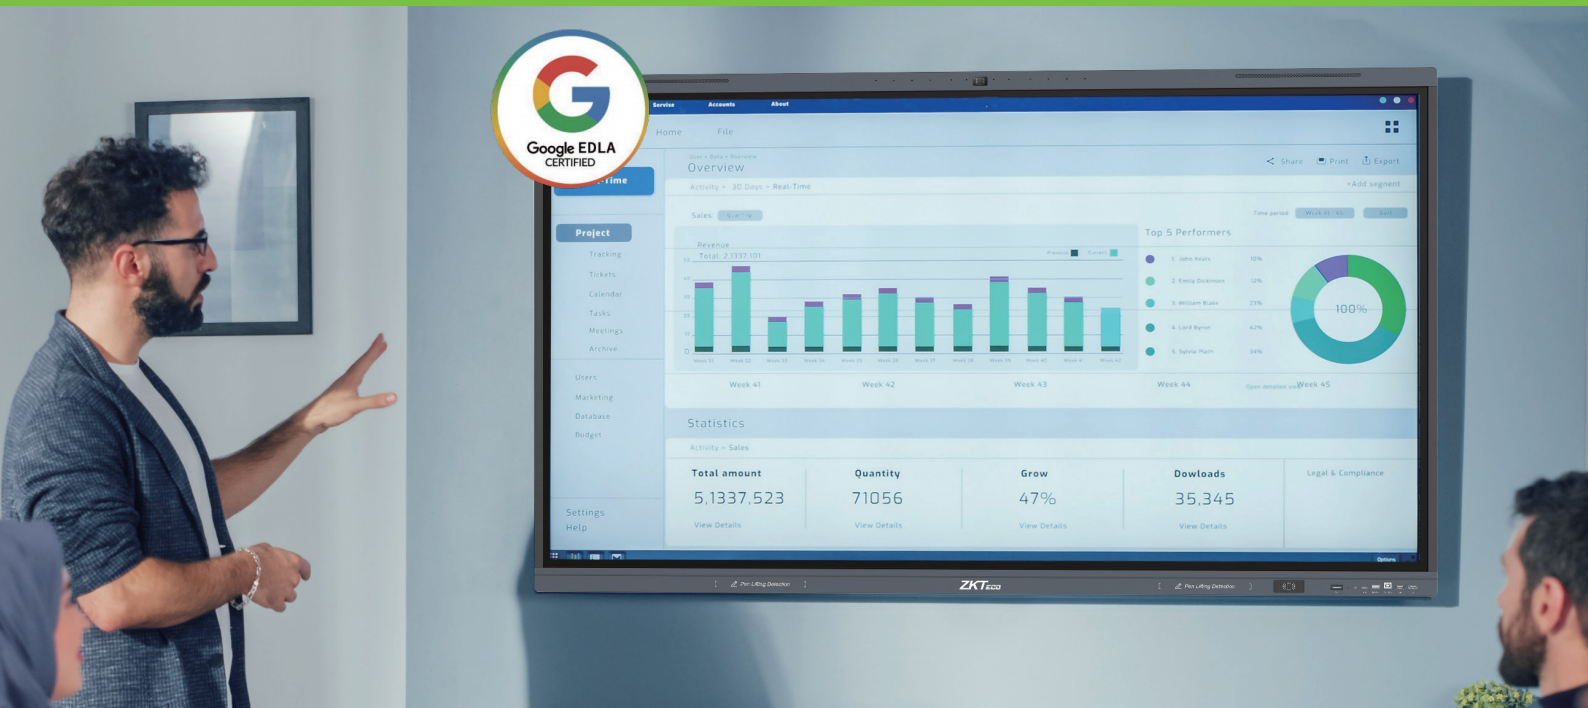

ZKTeco's 4K digital interactive whiteboard aims to promote the sharing of inspirational knowledge in business field and the educational environment. The integrated meeting solution of SC02-I565/75/86A product offer screen sharing, whiteboard writing and remote video conference, which strengthen collaboration.

Features



4K UHD Display



CPU:Quad core A76 + Quad core A55



Built-in 48MP Camera



Android 15.0 & Windows 11(Optional)



8 Microphones Array



Support NFC

Specifications


Model	SC02-I565A	SC02-I575A	SC02-I586A
Panel			
Screen size	65-in ch	75-inch	86-inch
Panel type	VA	VA	IPS
Backlight	D-LED		
Resolution	3840 × 2160 (pixels)		
Aspect Ratio	16:9		
Brightness (typ.)	350cd/m ² (typ.)	400cd/m ² (typ.)	400cd/m ² (typ.)
Contrast ratio (typ.)	4000:1 (typ.)	5000:1 (typ.)	5000:1 (typ.)
Viewing angle	178° (H) / 178° (V)		
Refresh Rate	60Hz		
Response Time	8ms		
Glass Hardness	9H (Pencil) 7 (Mohs)		
Glass Type	Anti-glare		
Backlight life (typ.)	50,000 hrs		
Touch			
Touch technology	High Precision IR		
Touch points	Up to 50		
Touch response time	≤2ms		
Touch Accuracy	Center 90% touch area: ±0.5mm		
Touch Object Recognition Range (Min)	Single touch: ≥1.5mm		
Writing height	≤1mm		
System			
CPU	Arm Cortex-A76*4 Cortex-A55 *4 (≥2.4Ghz)		
GPU	Mali-G610 MP4		
Memory	8GB (up to 16GB)		
Storage	128GB (up to 256GB)		
Operating system	Android 15.0 & Windows 11 (Optional)		
Connectivity			
Front Port	USB 3.0*2; Type-C (65W)*1; Touch*1; HDMI IN: 1		
Bottom Port	USB 2.0*1; DP IN*1; Touch*1; RS232*1; LAN*2; SPDIF*1		
Side Port	AUDIO IN*1; AUDIO OUT*1; Type-C OUT*1; USB 3.0*2; Touch * 1; HDMI IN: 3; HDMI OUT*1; Type-C (65W)*1; OPS slot (for slot-in PC)*1		
Built-in peripherals			
WiFi+Bluetooth		WiFi 6: 802.11 ax/b/g/n/ac	
		BT 5.2: 2.1+EDR/4.2/5.2	
NFC		ISO/ IEC 14443 A/ ISO/ IEC 14443 B	
Camera	Pixel	48 megapixels	
	FOV	FOV Diagonal 106°	
	Face tracking	Support	
	Sound localization	Support	
Microphone	Array quantity	8 microphones array (up to 12m)	
	Pickup Range	Support	
	3D noise reduction	Support	
	AEC & AGC	Support	
Speaker		2 x8W+2x18W	

Power			
Operating Power	100 V ~ 240 V/AC, 50/60 Hz		
Standby power consumption	<0.5W		
Power consumption(typ.)(100% brightness)	200W	300W	550W
Physical			
Dimensions (W × H × D)	1488x86x915mm	1709x86x1039mm	1957 x98.5 x1179mm
Package Dimensions (L × W × H)	1628x208x1014mm	1863x225x1163mm	2110x225x1304mm
Net Weight (kg)	40kg	52.5kg	64kg
Weight with Packaging (kg)	52kg	64kg	84kg
Case Material	Aluminium Alloy and Sheet Metal		
Color	Black grey		
Environment			
Operating Temperature	0°C to 40°C		
Storage Temperature	10°C to 60°C		
Operating Humidity	20% to 80% RH (Non-condensing)		
Storage Humidity	10% to 60% RH (Non-condensing)		
Accessories			
Cables	Power Cable*1, USB Cable*1, HDMI Cable*1		
Remote Controller	1		
Wall mount	1		
Stylus Pen	2		
Peripheral Accessories (Optional)			
Movable bracket	YES		
OPS	YES		
Wireless Dongle	YES		

Applications



Training room

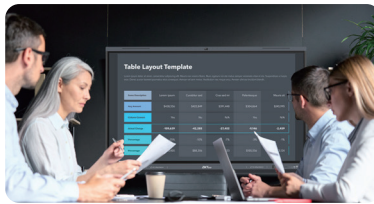

Meeting room



Show room

